

UC2024 - 200 lb Cube Ice Machine

Self-Contained Undercounter Ice Machine with Storage

Features and Benefits

Space Saving Design:

- Only 24" wide, this ice maker can be placed it the tightest locations
- Front breathing No side clearance required for flexible placement
- Recessed utility chase provides clearance for tight installs
- Optional floor mount kit lowers height to 33.5"

Ease of Use:

- Removable external air filter for easy cleaning
- Unit specific QR code for quick access to service manuals, cleaning guides and warranty history
- Ergonomic slide back door allows easy access to ice in the bin
- Power cord, NEMA 5-15P plug, ice scoop and adjustable legs are included for guick and easy installation

Reliability:

- Heavy duty, rust-free front panel and corrosion-resistant aluminum alloy side panels for maximum lifespan
- 3 Year parts and labor warranty
- Designed, engineered and assembled in the USA

High Production:

 Produces up to 230 lb (104 kg) per day and stores 80 lb (36 kg), maximizing ice output despite its small footprint

Environmentally Friendly:

- Meets new US federal energy efficiency requirements
- Meets US Safe Drinking Act low lead requirements
- Non-ozone depleting R-134A refrigerant





Front accessible external air filter for easy cleaning




Recessed utility chase provides clearance for tight installs



Ergonomic slide-back door allows easy access to ice in the bin



Unit specific QR code for quick access to service manuals, cleaning guides and warranty history

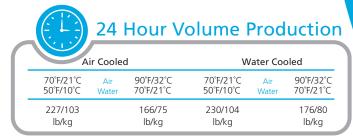









- 3 years parts and labor on all components
- 5 years parts on the compressor
- Warranty valid in North, South & Central America for commercial installations
- Contact factory for warranty in other regions
 Paridation Applications 1. Paridation of the pa
- Residential Applications: 1 year parts and labor












Front breathing and no side clearance required, allowing for flexible placement





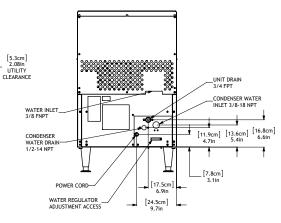



Specifications

| Storage Max. Fuse Size Energy Const | | | | | | Energy Consumption | Water Usage ption Gallons/100 lb (liters/45.4 kg) | | | | |
|-------------------------------------|---|-------------------|-------------------|------------------------------------|-----------------------------------|--------------------|--|---|------------------------|--------------------------|-----------------|
| ı | Model Number Cube Size: medium or small | Condenser Unit | Capacity lb/kg | Basic Electrical Volts/Hz/Phase | or HACR Circuit Breaker (amps) | Circuit Wires | Min. Circuit Ampacity | kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C) | Potable 90°F(32°C) | Condenser /70°F(21°C) | Energy Star® |
| | UC2024MA-1 UC2024MW-1 | Air Water | 80/36 80/36 | 115/60/1 115/60/1 | 15 15 | 2 2 | Cord Cord | 6.27 4.91 | 22.4/85.3 21.8/83.0 | - 111/422.7 | √ |
| l | ₩ [UC2024SA-1 UC2024SW-1 | Air Water | 80/36 80/36 | 115/60/1 115/60/1 | 15 15 | 2 | Cord Cord | 6.27 4.91 | 22.4/85.3 21.8/83.0 | - 111/422.7 | 4 |



All Models

Dimensions (W x D x H):

Unit: 24" X 28.5" X 39" (61.0 x 72.4 x 99.1 cm)

Height includes 6" (15.24 cm) adjustable legs

Shipping Carton: 29" x 39" x 39"

(73.7 x 99.1 x 99.1 cm)

Shipping Weight: 150 lb / 68 kg

BTUs per hour: 3,900

Refrigerant: R-134A



Accessories

| V | | |
|---------------|--|--|
| Model Number | Description | |
| KLP8S KBC1 | Kit, Leg 6", Stainless Steel Kit. Casters | |
| KUFM24 | Floor mount kit. Lowers height to 33.5" | |

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.



Operating Requirements

| | | Minimum | Maximum | |
|---|--------------------|-------------------|-------------------|--|
| | Air Temperatures | 50°F (10°C) | 100°F (38°C) | |
| | Water Temperatures | 40°F (4.4°C) | 100°F (38°C) | |
| | Water Pressures | 20 PSIG (1.4 bar) | 80 PSIG (5.5 bar) | |
| Ĺ | Electrical Voltage | -5% | +10% | |
| | | | | |

Specifications and design are subject to change without notice.

